




SCUVA™  
T400

**Model No: SCV-T400-N-SLV**

# SCUVA T400 DIMENSIONS

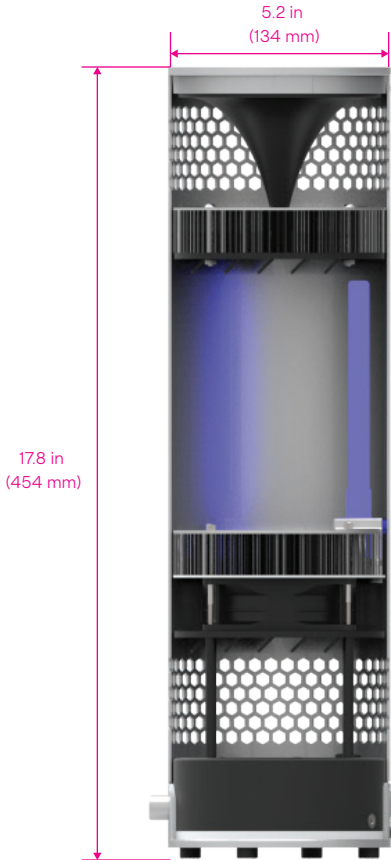

# SCUVA T400 AIR FLOW DIRECTION



# OPERATION

1. Read all instructions before using SCUVA T400.
2. Carefully remove the unit from the packaging.
3. Place on a firm and level surface.
4. See SERVICING for lamp installation.

5. **WARNING** Plug the cord set into a 120-volt outlet. Ensure that the plug fits tightly into outlet. When plugs fit loosely into receptacles, they may slip partially or completely out of the receptacle with only the slight movement of the attached cord. Receptacles in this condition may overheat and pose a serious fire hazard; if covered by a curtain or drape, the fire hazard is even greater.



6. **Do not operate this product with a damaged cord. Do not plug cord in after the unit malfunctions, has been dropped or damaged in any manner. Discard this product or return to an authorized service facility for examination and/or repair.**

7. **Do not run cord under carpeting. Do not cover cord with throw rugs, runners, or similar coverings. Do not route cord under furniture or appliances. Arrange cord away from traffic area and where it will not be tripped over.**

8. **WARNING** Skin or eye damage may result from directly viewing the light produced by the lamp in this apparatus. Always disconnect power before replacing or servicing. Replace lamp With Lamp Model No. TUV PL-S 9W/2P 1CT/6X10BOX, Manufactured by Philips, Inc.



9. Turn unit ON by pressing the POWER BUTTON (⏻). (Figure 1)
10. After unit is ON, the airflow can be adjusted by turning the FAN SPEED KNOB located on the front of the fixture. The unit doesn't have to be on full speed all the time for unit to be functional.
11. To prevent any damage, do not block air inlets or outlets in any manner. Do not use on soft surfaces, like a bed, where openings may become blocked.
12. To turn unit OFF, press the POWER BUTTON (⏻) and unplug the unit from the electrical outlet.
13. Do not use outdoors. Indoor use only.
14. This unit is not intended for use in bathrooms, laundry areas and similar indoor locations. Never locate unit where it may fall into a bathtub or water.

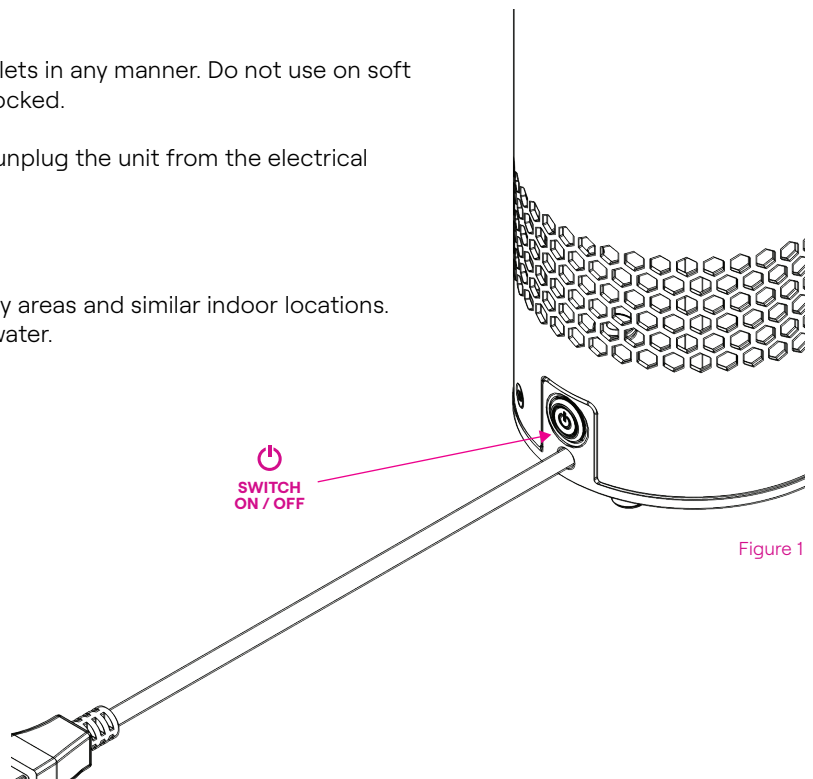


Figure 1

## SERVICING

1. Servicing should be done monthly to ensure no lamps have broken. Replace lamps every 6 months.
2. Unplug or disconnect SCUVA T400 from the power supply before servicing.
3. Remove Phillips screw from bottom of housing. (Figure 2)
4. Carefully remove housing from unit by pulling housing straight up until it clears all components. (Figure 3)

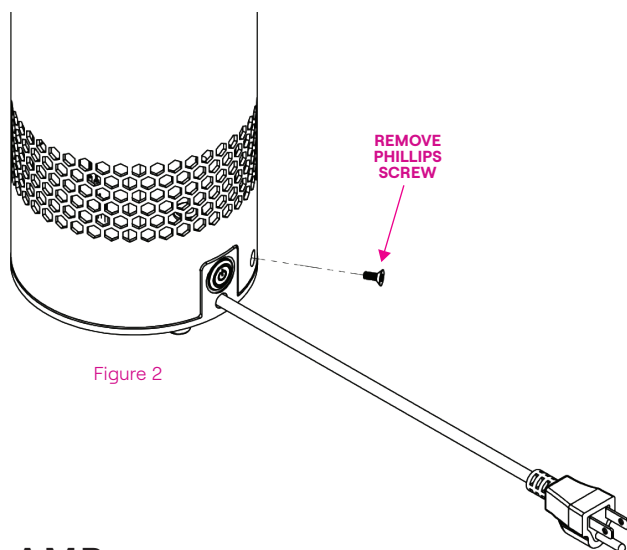


Figure 2

## TO REPLACE LAMP

1. Carefully remove the lamp from the packaging and clean it with soft and clean tissue. Only handle lamps while wearing protective gloves.
2. Remove old lamp from socket.
3. Wearing protective gloves, install the new lamp into the socket and make sure it is properly installed.
4. Carefully replace housing over unit and re-install Phillips screw.

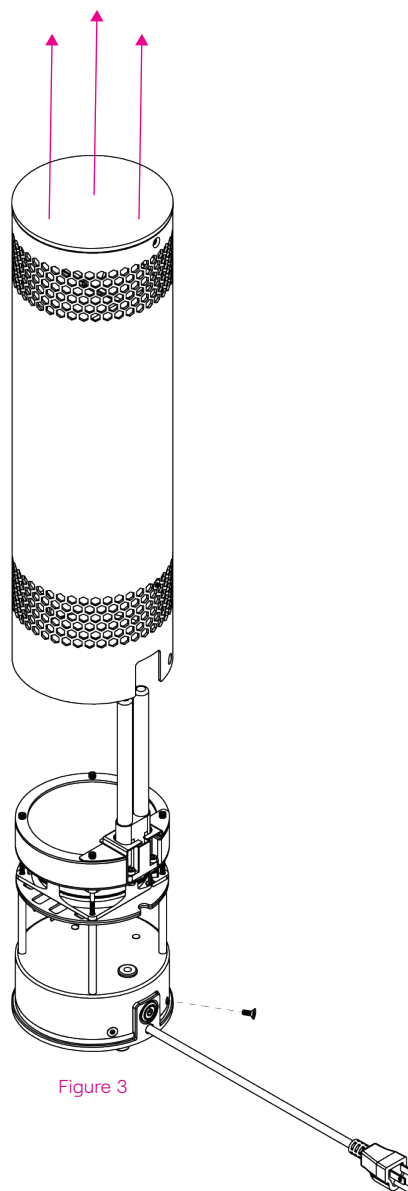


Figure 3